


175 x 5 x 5500 C

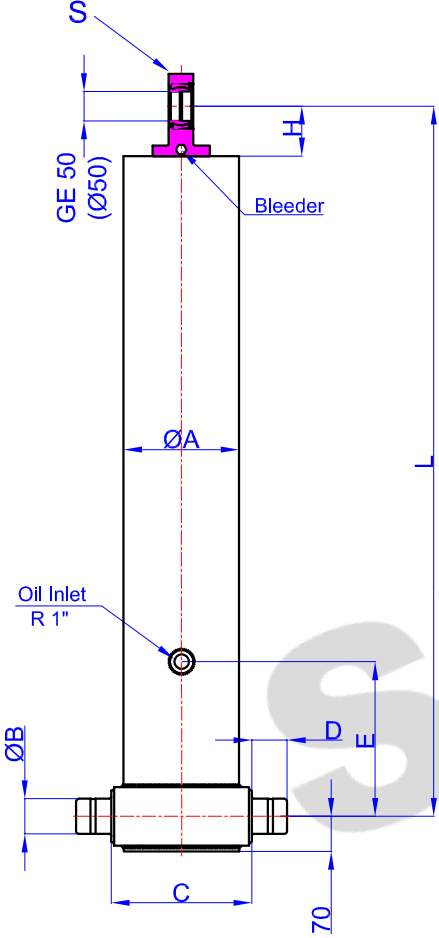

- A : 198 mm
- B : 60 mm
- C : 240 mm
- D : 60 mm
- E : 340 mm
- H : 93 mm
- L : 1395 mm
- S : 41 mm

Hard Chromed all stages
 Working Pressure : 160 Bar
 Max. Working Pressure : 180 Bar
 All Cylinder Materials are St 52 Cold Drawn Tubes

STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116	Ø98				
STROKE	1106	1105	1108	1108	1108				5500
OIL DISPLACEMENT (L)	28	22,5	17	12,5	9				89
THRUST AT 160 BAR (TONS)	40	31	24	18	13				

BL	7100			6900			6700		
Ro	200	500	800	200	500	800	200	500	800
α°	45	47	49	46	48	51	47	50	52
Ycog									
600	35	38	43	36	39	45	37	41	47
900	38	42	48	39	44	51	40	46	54
1200	41	47	55	43	49	54	45	52	65
st	5325	5326	5308	5290	5280	5355	5248	5333	5286

NOTICE:
 * Büyükyüksel Damper has adopted the principle of continuous improvement of its products
 * Büyükyüksel Damper; has right to make changes in technical drawings and specifications without prior notice
 * So; this technical drawing is given to be added to the contract annex and it is for informational purposes only

	Name	Date & Signature	
Designer	A.TAŞDELEN		
Control	A.ADIYAMAN		
Approval	O.ADIYAMAN		Trademark Name: SEMITÜRK
Type Approval	e5*2018/858*00075*00		www.yukseldamper.com.tr
Q.M.S. / No.	ISO 9001:2015 / QMS-0104558		www.semiturk.com.tr
Product Code	TX-SA-H5SC		info@yukseldamper.com.tr
Product Name	5 Stage Hydraulic Cylinder for Tipper		+90 530 610 1432 / +90 332 239 1860
All rights of this picture belong to BÜYÜKYÜKSEL DAMPER LTD. ŞTİ. So, it can not be reproduced, copied and published without permission			